




13.22

EN 60669-1 / EN 60669-2-1	
	13.22.8.230.B000 U_N 230 V AC (50/60 Hz) U_{min} 184 V AC U_{max} 253 V AC P 2 VA (50 Hz) / 0.5 W
	2 NO (DPST-NO) 6 A 230 V AC
	$AC1$ 1380 VA $AC15$ 300 VA (230 V) 200 W (230 V) 200 W CFL-LED (230 V) 200 W (230 V AC) 200 W
	(-10...+50)°C
	5 (\leq 1 mA)
IP20	


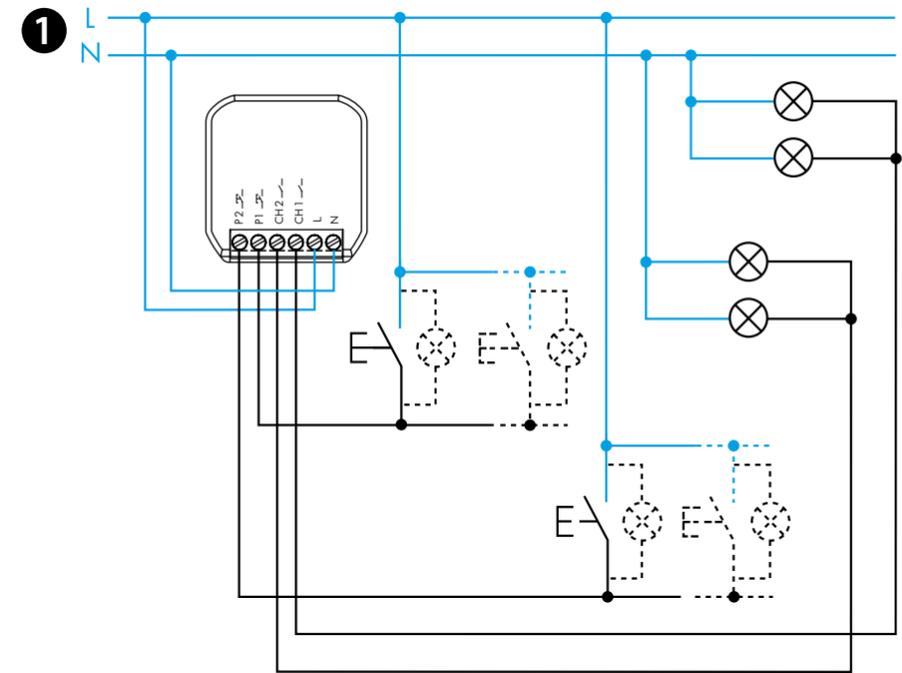


2 Bluetooth™

Download on the **App Store**

FINDER TOOLBOX

GET IT ON **Google Play**

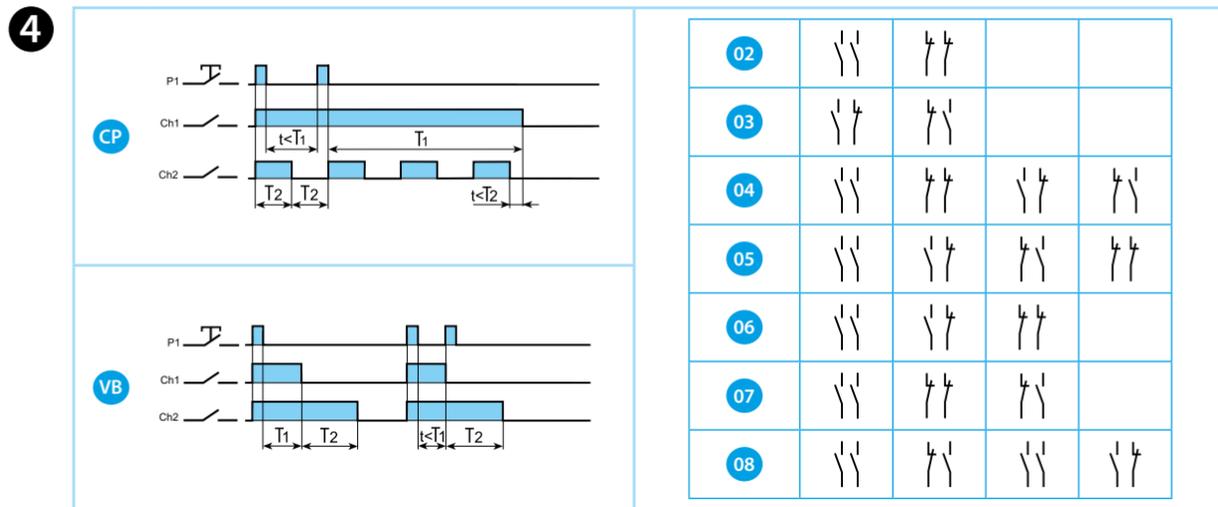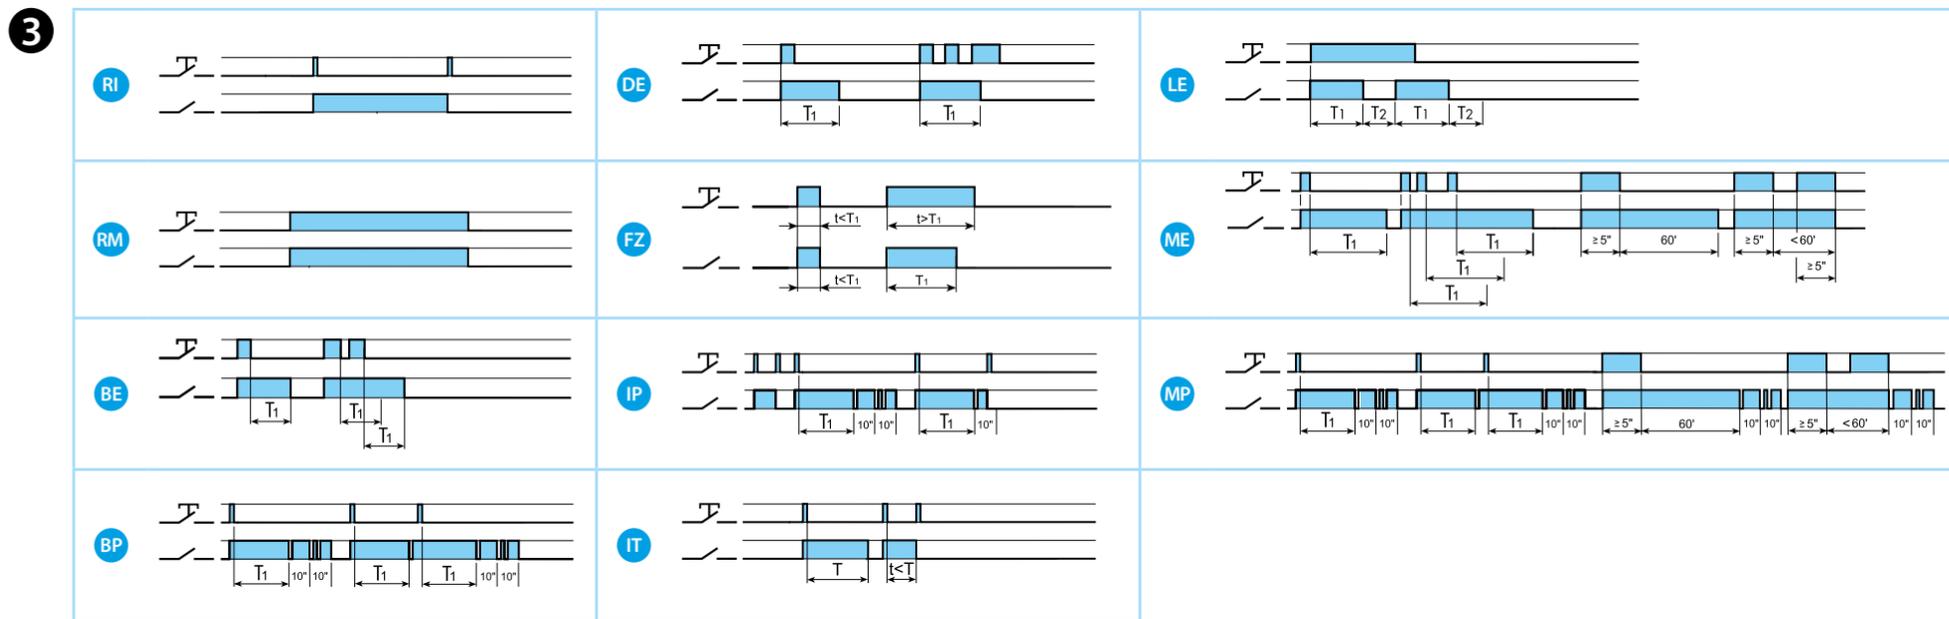

ENGLISH

13.22.8.230.B000 MULTI-FUNCTION RELAY

1 WIRING DIAGRAM
 Channel 1: Ch1 - push button 1 (P1)
 Channel 2: Ch2 - push button 2 (P2)

2 FINDER TOOLBOX APPLICATION
 With the Finder Toolbox App you can:
 - Set the functions, the Sequences and the timing (T1, T2) on the Ch1 - Ch2 channels
 - Associate the wireless button
 - Set the scenarios

NOTE
 - Transmission range: approximately 10 m in free space and without obstacles
 - The transmission range may vary depending on the building structure
 Example:
 - Reinforced concrete walls and/or metal walls
 - Partition walls filled with insulating wool on a metallic backing
 - Ceilings with metal or carbon fiber panels
 - Lead glass or glass with metal cladding, steel furniture

3 FUNCTIONS for single channel
 The Ch1 and Ch2 channels are independent and can be set with different functions. Timings (T1, T2): from 1s to 24h.
 RI: factory pre-set function on both channels

4 FUNCTIONS using both channels
 Switching sequences 02 to 08 work on both Ch1 and Ch2.
NOTE
 P1 (SET): leads to the next state
 P2 (RESET): leads to the initial state

